







Recessed Uni Linear LED Light - UC2711


Article No.	Description	Illustration
	Recessed Uni Linear LED Lights , brushed stainless/black	
UC2711-45ABN-CW	L. 413mm, cool white	2 LEDs (5 watts)  
UC2711-45ABN-WW	L. 413mm, warm white	
UC2711IRH-45ABN-CW	L. 413mm, cool white	
UC2711IRH-45ABN-WW	L. 413mm, warm white	
UC2711-60ABN-CW	L. 563mm, cool white	3 LEDs (7.5 watts)  
UC2711-60ABN-WW	L. 563mm, warm white	
UC2711IRH-60ABN-CW	L. 563mm, cool white	
UC2711IRH-60ABN-WW	L. 563mm, warm white	
UC2711-90ABN-CW	L. 863mm, cool white	4 LEDs (10 watts)  
UC2711-90ABN-WW	L. 863mm, warm white	
UC2711IRH-90ABN-CW	L. 863mm, cool white	
UC2711IRH-90ABN-WW	L. 863mm, warm white	
UC2711-120ABN-CW	L. 1,163mm, cool white	5 LEDs (12.5 watts)  
UC2711-120ABN-WW	L. 1,163mm, warm white	
UC2711IRH-120ABN-CW	L. 1,163mm, cool white	
UC2711IRH-120ABN-WW	L. 1,163mm, warm white	


Recessed Uni Linear LED Light - UC2711



- * Application: under cabinet and shelf in kitchen, bathroom, home and office
- * Extruded aluminium housing, push-fit installation
- * With MCPET reflector & acrylic diffuser
- * Single LED star module, Cree® high power XP-E

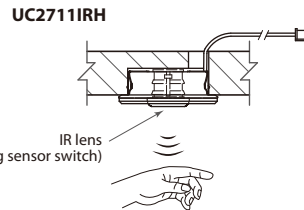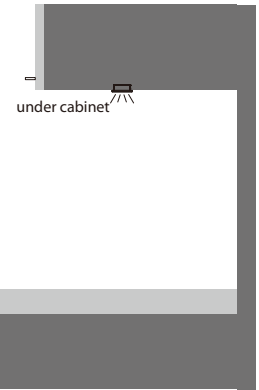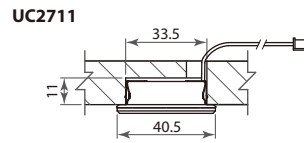

Routed dimension: 33.5x11xRL (mm)




Item no.	RL
UC2711-45	398mm
UC2711-60	548mm
UC2711-90	848mm
UC2711-120	1,148mm

* UC2711-60 operating voltage:
700mA constant current, 3 LEDs 7.5W

Light color	warm white (WW)	cool white (CW)
Kelvins	3,000k	6,000k
Light output lumen		
Efficacy lumen per watt		
Color rendering index (CRI)		

* UC2711-60 light distribution diagram:

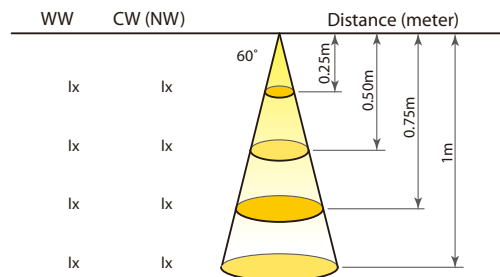

700mA Constant Current Power Supply & Light Control (Optional)

- * Modular power system to connect single or multiple lights
- * For more information, please refer to page xxx

